



# [Inverter FW Update - connection of inverter]

LOCAL SETTING -> Maintenance -> Firmware Update


Enter Firmware update page.

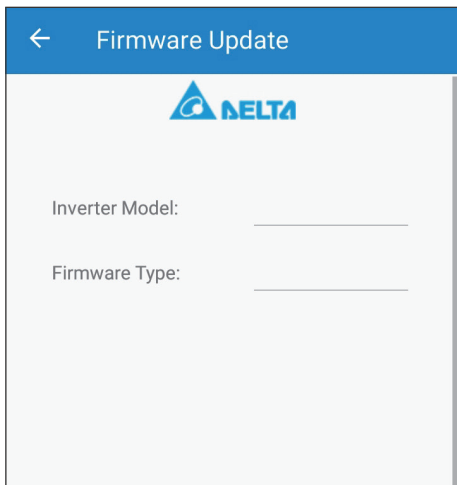


Click "OK" the app will ask users to connect to Internet.

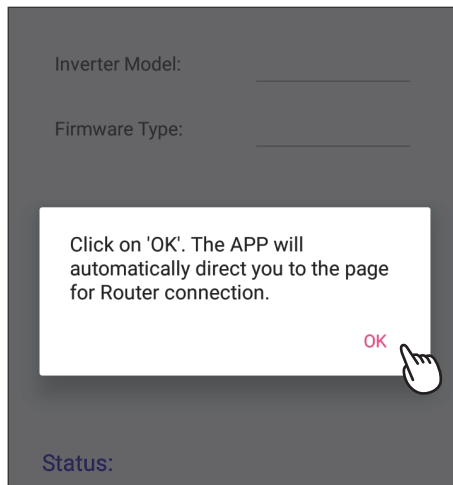


Select a method to get Internet ability.

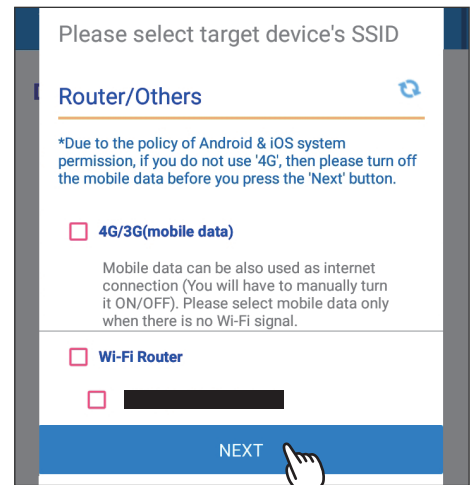


Click "Inverter Model".

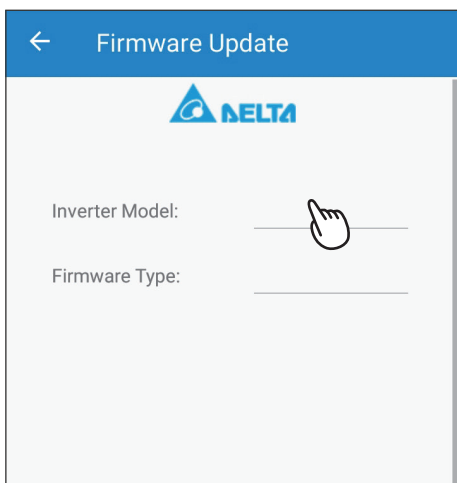


Select a Inverter model for FW update.

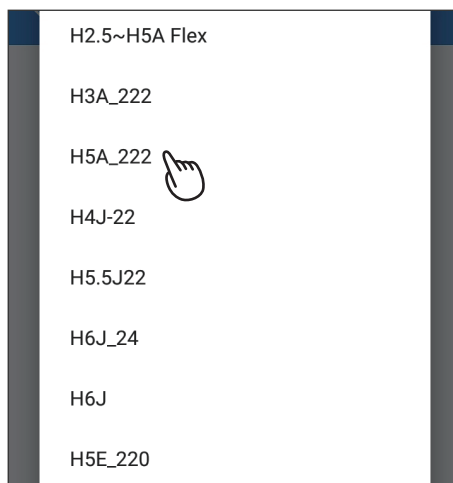


Select FW type, please confirm with local service for the FW type.

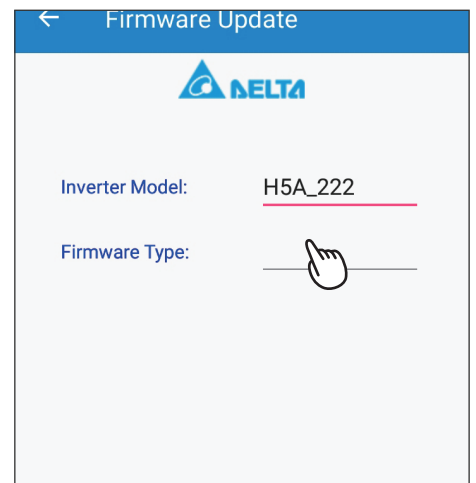


Click "Load Hex File".

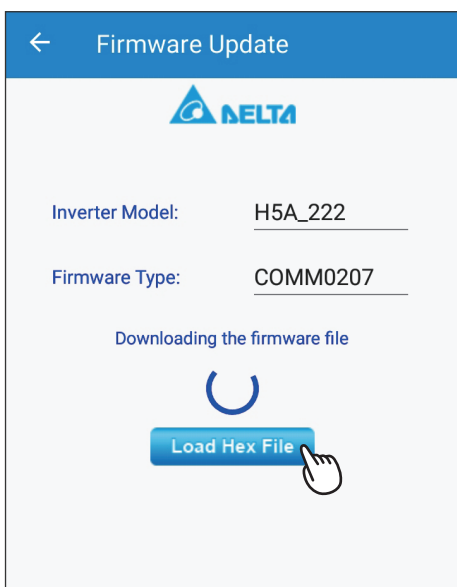

After downloading complete, click "Scan inverter".

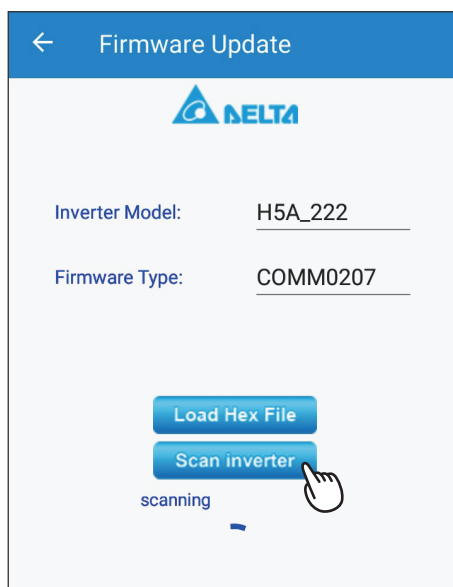

Select the Inverter serial number for FW update.

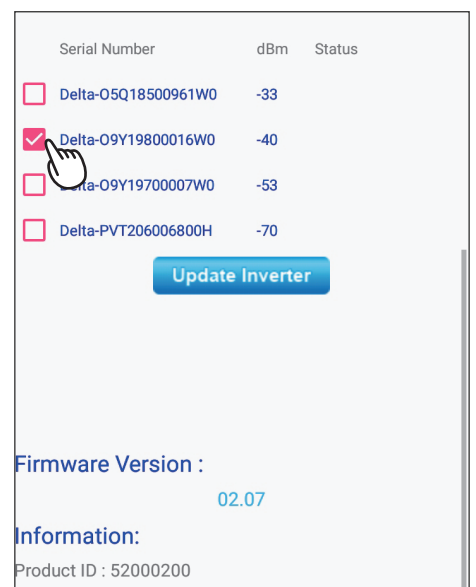

Click "Update Inverter".

Serial Number	dBm	Status
<input type="checkbox"/> Delta-05Q18500961W0	-33	
<input checked="" type="checkbox"/> Delta-09Y19800016W0	-40	Checking connection of inverter
<input type="checkbox"/> Delta-09Y19700007W0	-53	
<input type="checkbox"/> Delta-PVT206006800H	-70	

**Update Inverter**

Firmware Version : 02.07

**Information:**  
Product ID : 52000200  
Processor : 0  
Start address : 08020000  
Stop address : 080FFFFF  
Checksum : 0x064F  
OK

Upgrading...

Serial Number	dBm	Status
<input type="checkbox"/> Delta-05Q18500961W0	-33	
<input checked="" type="checkbox"/> Delta-09Y19800016W0	-40	Upgrading
<input type="checkbox"/> Delta-09Y19700007W0	-53	
<input type="checkbox"/> Delta-PVT206006800H	-70	

Transmission: 8% 136

Firmware Version : 02.07

**Information:**  
TCPGetPIDCmd done  
ReqBoot1Tcp done  
ReqBoot2Tcp done  
ProcessorSelectTCP done  
BankSelectTCP done  
InternalProcTCP done

Click "OK".

Scan inverter

If your device is not on the list. Please click on scan and move closer to your device.

Serial Number	dBm	Status
<input type="checkbox"/> Delta-05Q18500961W0	-33	
<input checked="" type="checkbox"/> Delta-09Y19800016W0	-40	Success
<input type="checkbox"/> Delta-09Y19700007W0	-53	
<input type="checkbox"/> Delta-PVT206006800H	-70	

**Update Inverter**

Firmware Version : 02.07

**Information:**  
BurnProcessTCP done  
BankCloseProcTCP done  
BurnDoneProcTCP done  
InternalProcTCP\_final done  
Total Tx Len :227968